

# INVESTMENT CAST 316 S.S. SAMPLING VALVE

FIG. NO. 51B (CF8M) RESILIENT SEAT - LEVER OPERATED




## Design Features

- Cast in corrosion resistant stainless steel.
- 2" NPT X 1 1/2" outlet
- Designed with all wetted parts of 316SS (CF8M) and a viton resilient seat for positive shut-off.
- Lever operated
- Designed for installation in pipe lines or tanks where an occasional sample is required.
- 150 PSI Maximum working pressure.

*Designed to handle corrosive fluids  
in the process industries.*

# Investment Cast 316 Stainless Steel Sampling Valves

Size 2" NPT x 1 1/2" Outlet

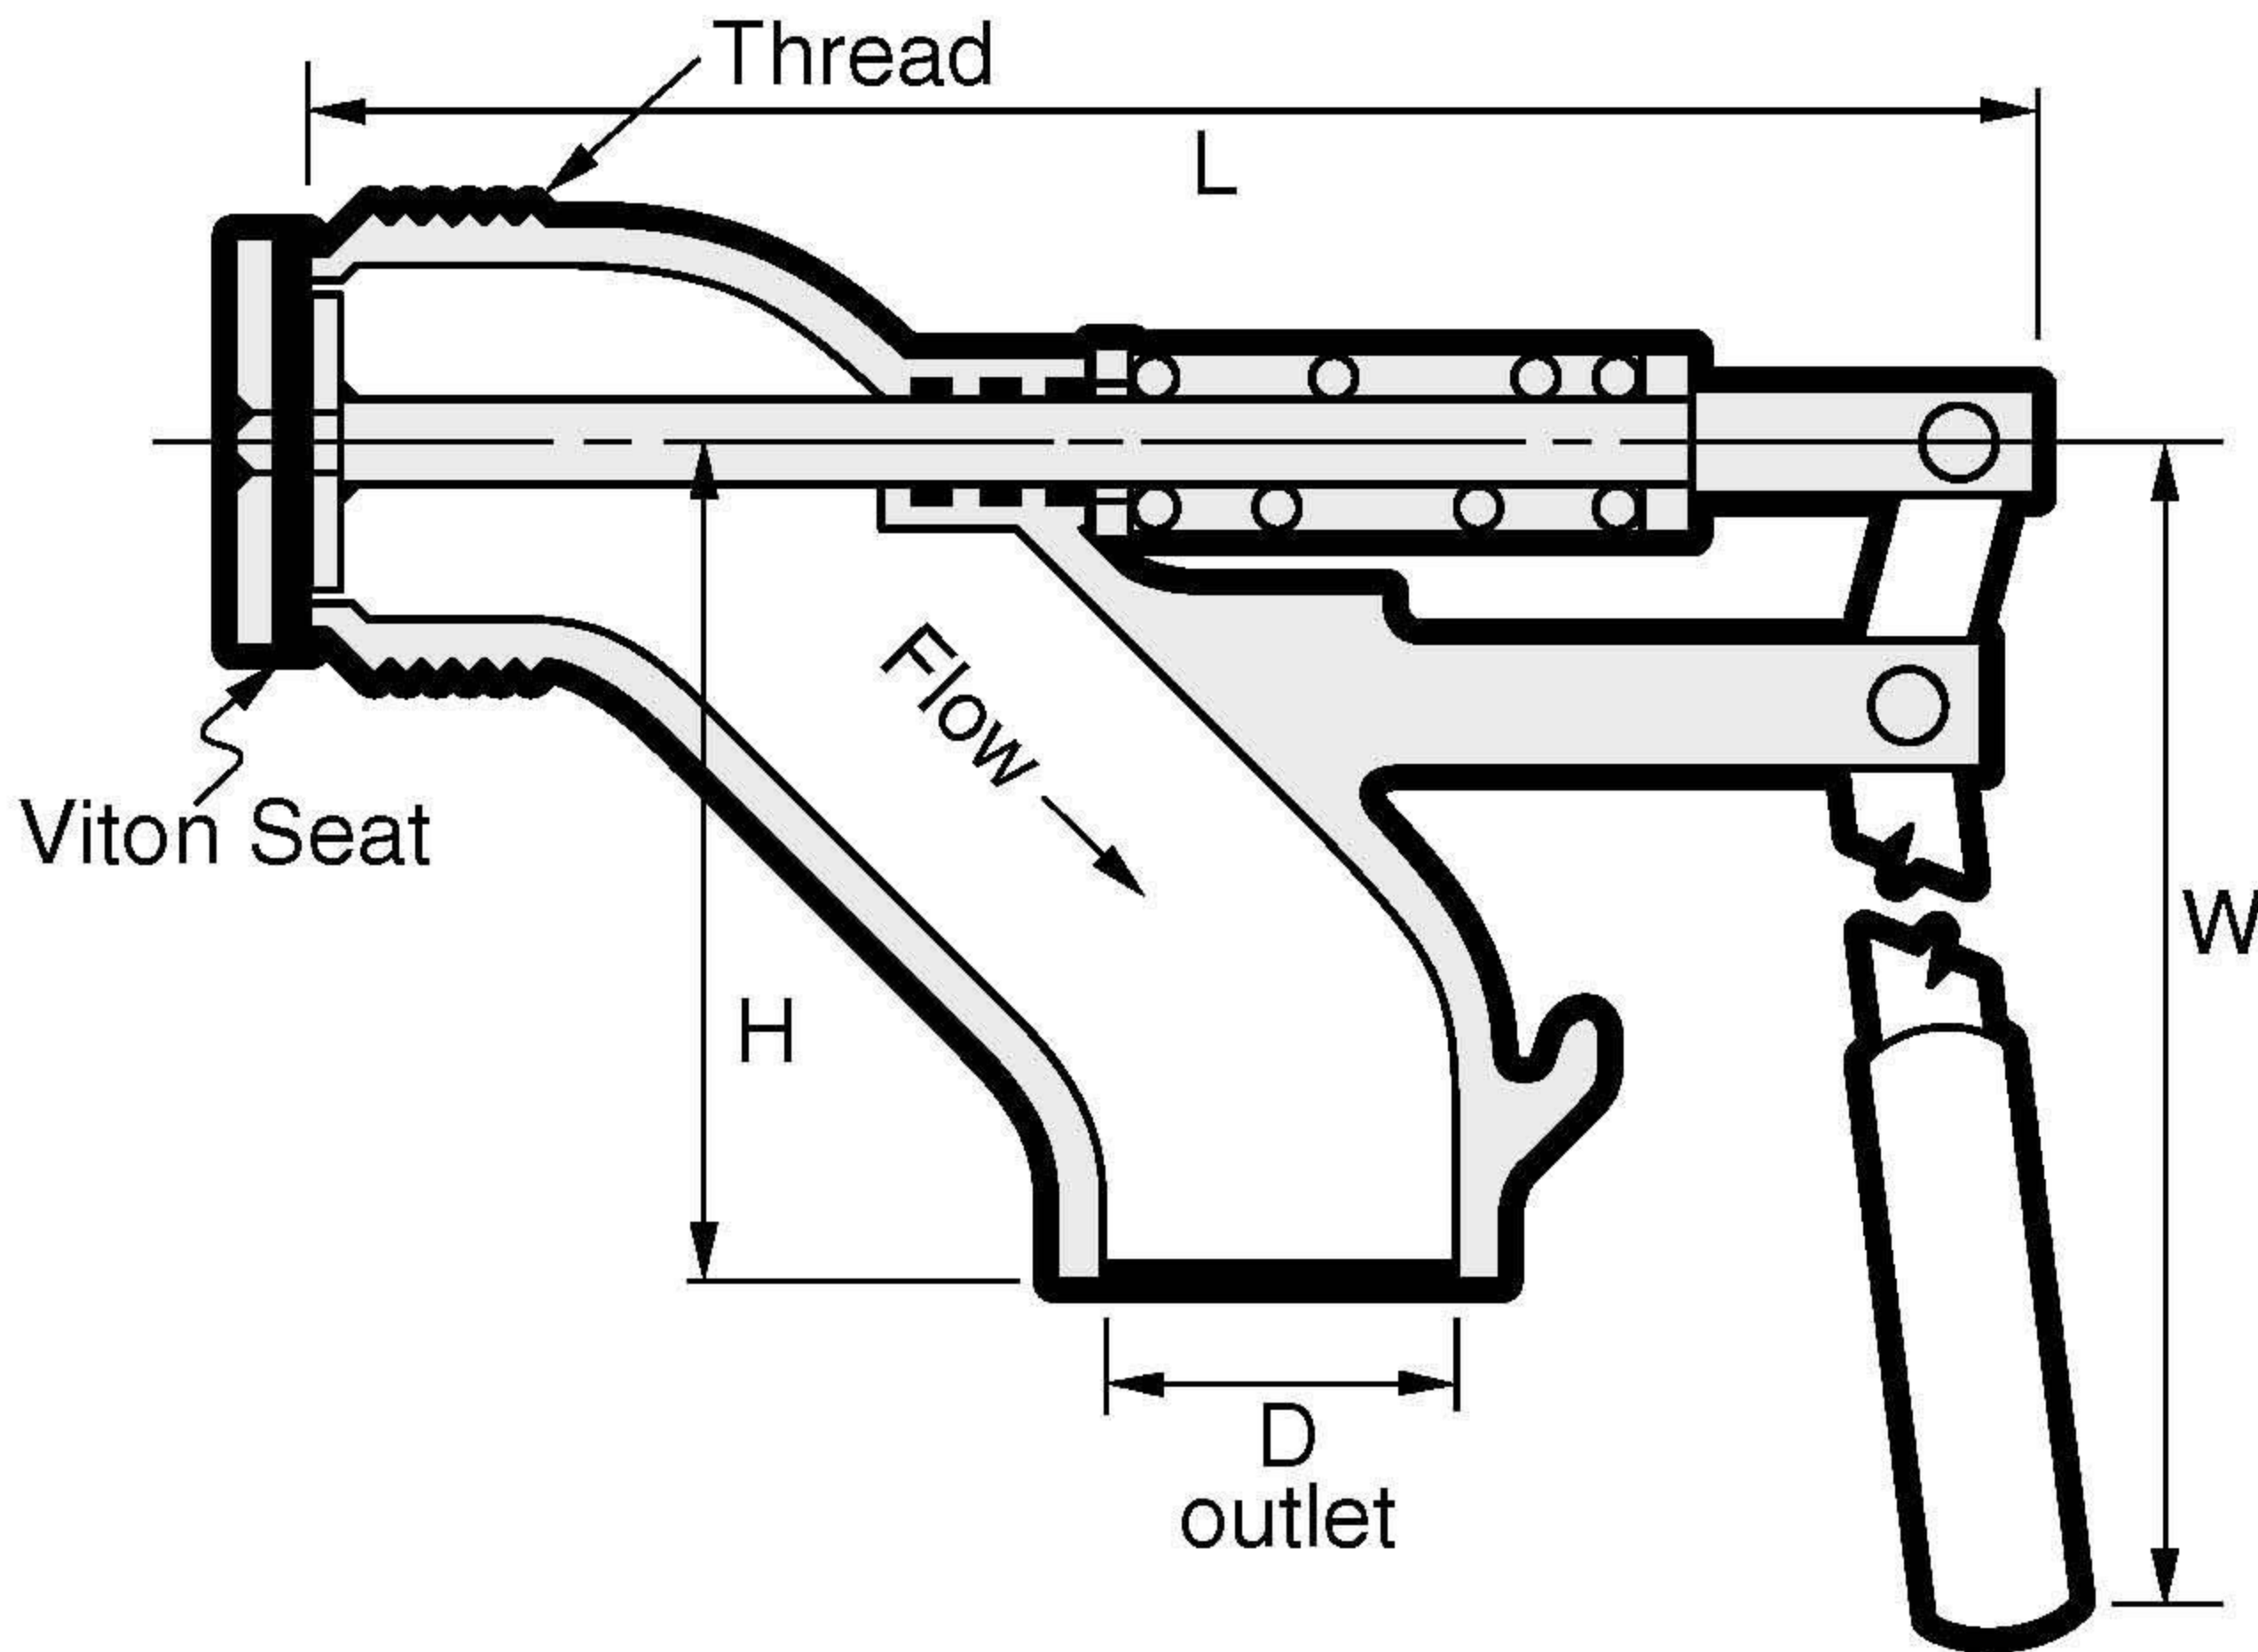

## DIMENSIONS (UNIT: INCH/MM)

D I M E N S I O N S						
Size	D	THD	L	H	W	WEIGHT
2 in	1 1/2	2 NPT	9 1/4	5 1/2	12	5 LBS
51 mm	38	2 NPT	235	140	305	11 kg